



CHECKERS

Justrite Safety Group

UC1210 WHEEL CHOCK

PRODUCT INFORMATION BROCHURE





PICTURED: UC1210

Checkers™ wheel chocks comply with the safety requirements of a variety of industries and ensure a safe working environment while your vehicles are at rest. Offered in a variety of styles, our wheel chocks provide a safe chocking solution for any type of vehicle.

Checkers™ wheel chocks were engineered in collaboration with safety experts to work with a wide range of ground equipment, commercial, and military vehicles. Whether you are chocking a fully-loaded 400-ton haul truck or a utility trailer, we have the wheel chocks you need to safely secure your vehicle and meet compliance standards.

- **We are one of the largest manufacturers of wheel chocks in the world**
- **We manufacture the most popular wheel chocks in the highly-demanding mining industry**
- **Checkers™ wheel chocks are manufactured in the USA, in Broomfield, Colorado**
- **Polyurethane wheel chocks are resistant to extreme weather conditions, tears, abrasions, oils, and solvents**
- **Polyurethane chocks are extremely lightweight compared to excessive steel and aluminum counterparts**
- **Long-lasting product life span results in cost savings**
- **Checkers™ produces a wheel chock for virtually every type of tire-based vehicle**
- **Our wheel chocks are engineered to reduce damage to your vehicle's tires**
- **High-visibility safety colors used on most of our wheel chocks**
- **Checkers™ wheel chocks satisfy MSHA, OSHA, SAE, NFPA, and DOT compliance standards**
- **Recessed carrying handles included on most models**
- **Mounting brackets available for most models**

UC1210 GENERAL-PURPOSE WHEEL CHOCKS

are manufactured with highly durable, lightweight polyurethane construction. These chocks are ideal for use with over-the-road trucks, trailers, pickups and utility vehicles.

Material: UV-stabilized polyurethane

- Durable urethane construction
- Oil and chemical resistant
- Recessed carrying handle
- Molded-in "How-to-Use" guidelines
- Mounting hole for ropes, chains or brackets
- This chock is rated for tire diameters 46-in to 65-in (116.8 cm to 165.1 cm) and mass gross vehicle operating weight up to 245,000 lbs. (111,130 kg)

⚠ WARNING: This product can expose you to chemicals including Acrylonitrile and Styrene, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



MODEL: UC1210


APPLICATIONS

- Civil Engineering and Construction
- Mining
- Military Sites
- Infrastructure and Utilities Maintenance
- Transmission
- Heavy Industry

ACCESSORIES & SPECIFICATIONS



Model: MC1900

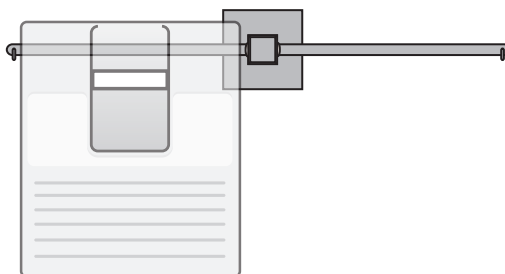

Model	Base Design	Length	Width	Height	Weight
UC1210	Aluminum Cleat Cored Bottom	15.5 in. (39.4 cm)	8.5 in. (21.6 cm)	8.25 in. (21.0 cm)	7.1 lb. (3.2 kg)
MC1900	Universal Dual Mounting Bracket holds 2 chocks. Hardware not included.	36 in. (91.4 cm)	6 in. (15.2 cm)	N/A	16 lb. (7.3 kg)



CHECKERS™

620 Compton St
Broomfield, CO 80020

PHONE: (800) 438-9336

FAX: (720) 890-4858

EMAIL: sales@checkers-safety.com

www.checkers-safety.com

Ver: 5/19

A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers, eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.